



# AM6

## SPECIFICATIONS

TYPE: MOVING COIL DYNAMIC  
MICROPHONE

CHARACTERISTICS: UNI-DIRECTIONAL


IMPEDANCE: 600 ohm  $\pm$ 30% AT 1,000 Hz

SENSITIVITY:  $-74 \pm 3$ dB AT 1,000 Hz

FREQUENCY RESPONSE: 70-14,000 Hz

CABLE: 5.5 MM x 15 FEETS WITH 6.3 MM  
PHONE PLUG

WEIGHT: 350 GRAMS WITHOUT CABLE AND  
BOX

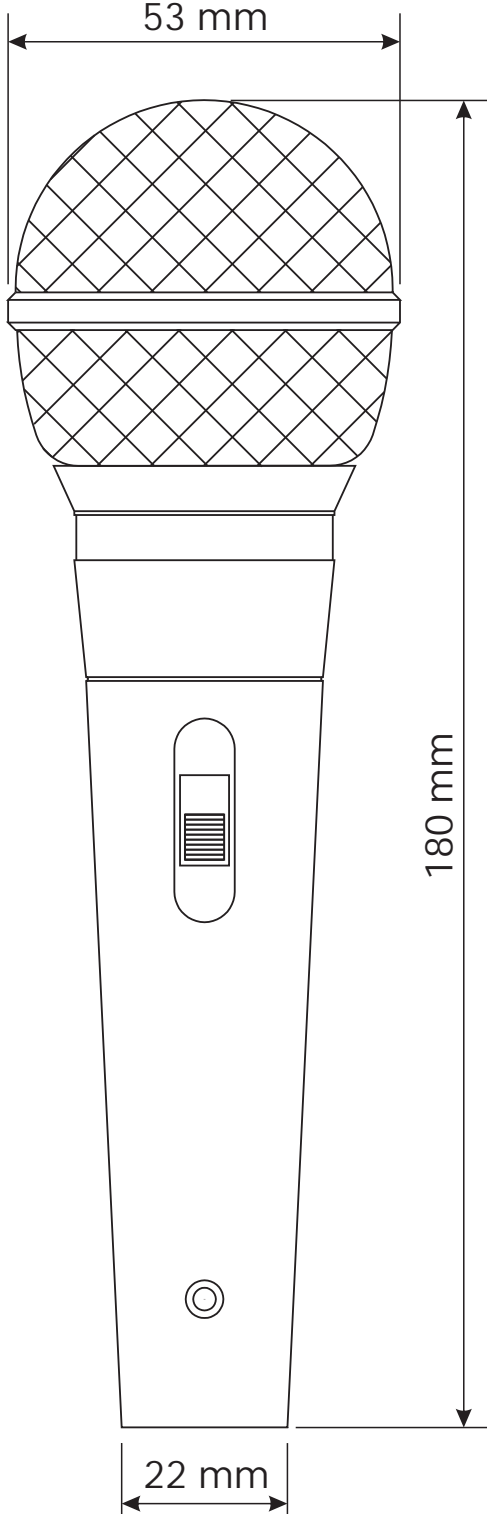

## FREQUENCY RESPONSE CURVE

